

Corner Support CS S90&S100

A structure element to be used for connections between two AF S90 & S100 Beam Sections when the structural design requires an alternative to Cross Connector CC H90 & CC H100 as the default solution.



The Key Advantages



- Compact design for quick, easy installation in multiple configurations.
- No welding, no downtime.
- Ultra-strong and rigid connection.

Installation

- To be used in pairs only.
- 4×ThB-H, and 4×Hexagon head bolts are necessary for one Corner Support*

Technical Data

- **Material Composition:**
Steel S275JR – EN 10025
- **Surface Finish:**
Hot-dipped galv. 55µm DIN EN ISO 1461

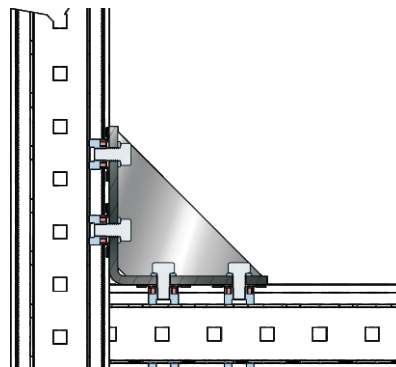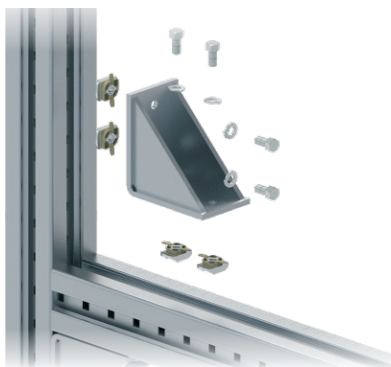

Type	Part-No.	Dimensions of Base Plate [mm]	Beam Section	Weight [kg/pc]	Pack Size [pcs]
CS S90	11709001	130×130×94	S90	2.9	1
CS S100	11710002	130×130×103	S100 & S150	3	1

➤ *4×ThB M12 and 4× Hexagon nuts M12 also are used to fix the Corner Support