

Art. 613

Sound Insulated Duct Bracket (A-Type)


Application/Advantages

- For vibration-insulated suspension of round air ducts.
- Mounting of ducts either close to a ceiling, or for suspended installation when using a threaded rod.
- Bending points are punched, ensuring easy and exact adjustment to pipe diameter.
- Simple attachment to the air duct with rivets or self-drilling screws.
- Suitable where soundproof installation according to DIN 4109 is required.



Technical Data

- **Material:**
Steel 1.0332 acc. to DIN EN 10111
- **Zinc plating:**
Electro zinc plated, 8-12 µm
- **Sound absorption unit:**
EPDM, black
- **Hardness:**
45° +/- 5° Shore-A
- **Temperature range:**
-50°C to +110°C

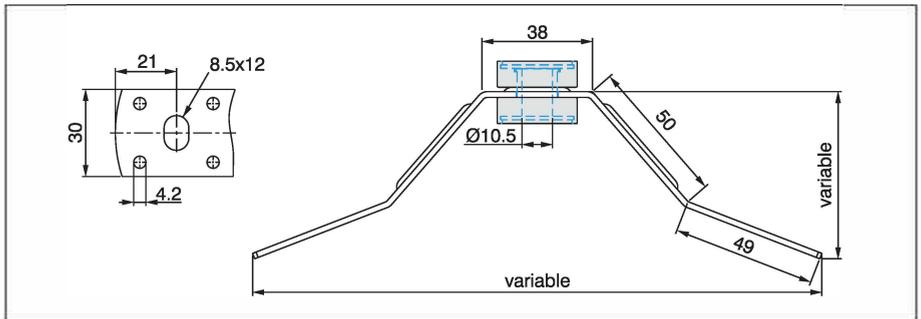

Article Number	Type	Material wxt [mm]	Max. Rec. Load [N]	 [pcs]
1002 613 001	Type A	30x2.0	550	100