
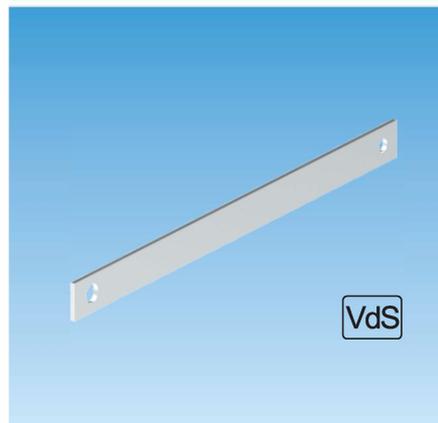


Art. 672

Beam Clamp Safety Strap (Electro-Galvanised)

Application/Advantages

- According to the German VdS regulations, beam clamps must be secured with safety strips when the pipe to be fixed is larger than DN50 with M8 beam clamps, and DN65 with M10 beam clamps.
- Dimensions and material meet VdS CEA-guidelines for sprinkler systems.

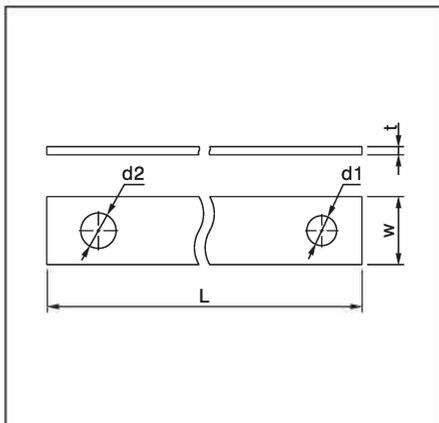


Technical Data

- **Material (Metal component):**
Steel 1.0332 acc. to DIN EN 10111
- **Zinc plating:**
Electro zinc plated, $\geq 13 \mu\text{m}$

Note

- This style safety bracket can also be used on tapered flanges.
- The safety strip is bent on-site to the form of the beam, so that it securely encompasses the edge of the beam flanges.

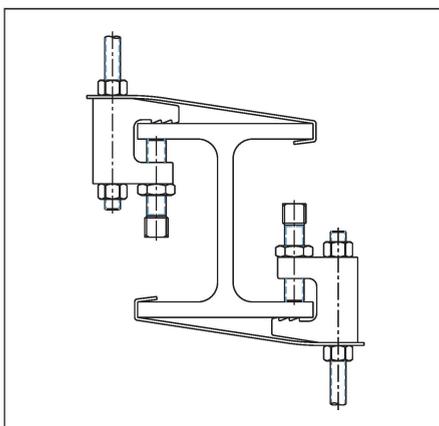

Article Number	Bore		Material w x t [mm]	Length L [mm]	VdS Approved	FM Approved	Pack Size [pcs]
	d1 [mm]	d2 [mm]					
0802 672 001	10.5	12.5	25x3.0	350	●	—	50
0802 672 002	12.5	17.0	40x3.0	400	●	—	50