

Art. 232


Two Screw Pipe Clamp w/ Lining, (E-Type)

Application/Advantages

- For fixing of drinking and heating water pipe lines.
- **Economy type designed using cost saving materials.**
- Two lock bolts allow adjustment to accommodate varying pipe diameters.
- Lock-screw with captive plastic washer to prevent loss.
- Combination nut for cost-effective and flexibility on-site.
- Solid design with reinforcement band rib.
- Strong sound insulation insert for firm fit.

Technical Data

- Material: Steel 1.0332 acc. to DIN EN 10111
- Zinc plating: Electro zinc plated, 8–12 µm
- Sound absorption lining: EPDM; chlorine-free; silicone-free
- Noise reduction: According to DIN 4109
- Temperature resistance: -50°C to +110°C
- EPDM hardness: 45° +/- 5° Shore-A
- Fire behaviour: Class B2 according to DIN 4102

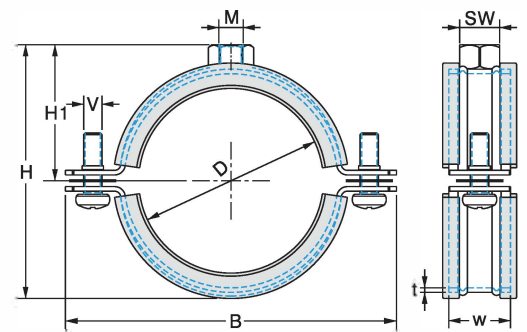

Article Number	Clamping Range		Connecting Thread	w x t	Dimensions [mm]					Pack Size [pcs]	Max. Rec. Load [N]
	D[mm]	[inch]			B	H	H1	SW	V		
1218 232 012	12-14	1/4	M8	20x1.2	50	43	29	43	M5x16	150	1300
1218 232 015	15-19	3/8	M8	20x1.2	54	47	31	47	M5x16	150	1300
1218 232 020	20-23	1/2	M8	20x1.2	59	51	33	51	M5x16	100	1300
1218 232 024	24-28	3/4	M8	20x1.2	64	56	36	56	M5x16	100	1300
1218 232 031	31-35	1	M8	20x1.2	71	63	39	63	M5x16	100	1300
1218 232 038	38-43	1-1/4	M8	20x1.2	79	71	43	71	M5x16	50	1300
1218 232 048	48-51	1-1/2	M8	20x1.2	88	79	47	79	M5x16	50	1300
1218 232 052	52-56	–	M8	20x1.5	93	84	50	84	M6x25	50	1500
1218 232 057	57-63	2	M8	20x1.5	100	91	54	91	M6x25	50	1500
1218 232 063	63-67	–	M8	20x1.5	104	95	56	95	M6x25	50	1500
1218 232 070	70-73	–	M8	20x1.5	110	101	59	101	M6x25	50	1500
1218 232 074	74-80	2-1/2	M8	20x1.5	117	108	62	108	M6x25	50	1500
1218 232 083	83-91	3	M8	20x1.5	128	119	68	119	M6x25	50	1500
1218 232 101	101-106	–	M8/M10	25x1.5	150	135	76	135	M6x25	25	1800
1218 232 108	108-114	4	M8/M10	25x1.5	159	144	80	144	M6x25	25	1800
1218 232 125	125	–	M8/M10	25x2.0	172	156	86	156	M6x25	25	2300
1218 232 131	131-135	–	M8/M10	25x2.0	182	166	91	166	M6x25	25	2300
1218 232 136	136-140	5	M8/M10	25x2.0	188	173	95	173	M6x25	25	2300
1218 232 159	159-163	–	M8/M10	25x2.0	210	194	105	194	M6x25	20	2300
1218 232 165	165-169	6	M8/M10	25x2.0	216	200	108	200	M6x25	20	2300
1218 232 210	210-212	–	M8/M10	25x2.0	259	243	130	243	M6x25	10	2300
1218 232 216	216-220	8	M8/M10	25x2.0	272	256	136	256	M6x25	10	2300