
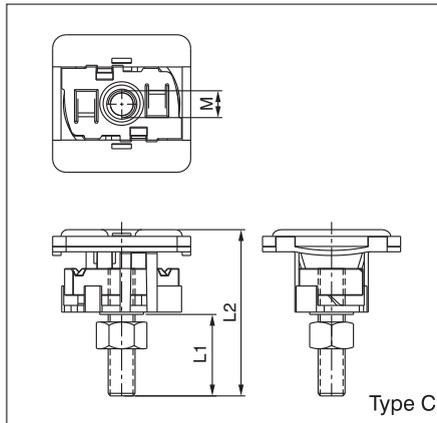


Art. 412 & 422

EFIX Quick-Nut w/ Rod (For C-Channel/Strut)

Application/Advantages

- **Patented safety mechanism.** Quick Nut with integrated threaded bolt and nut which is ready for installation.
- Immediate clamping in the C channel and Strut.
- No special tools required.
- Repeated and functional safe sliding possible whilst connected without unplugging.
- Height adjustment is possible by turning in or out.
- Direct connections are possible due to overlapping of thread length.

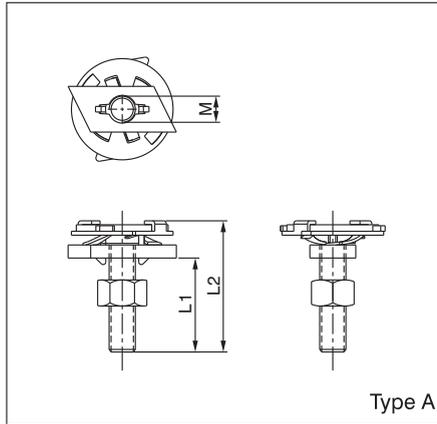

Technical Data

- **Material:** Steel 1.0332 acc. to DIN EN 10111
- **Zinc plating:** Electro zinc plated, 8–12 µm
- **Plastic Colour:** Blue

Note

- Varying plastic colours available subject to request.
- Recommended for direct fastening of pipe clamps.

Article Number	Type	For Channel & Strut	Thread M [mm]	Dimensions [mm]		Max. Rec. Load [N]	Pack Size [pcs]
				L1	L2		
0531 412 001	Type A	27/18/1.2 28/30/1.8 30/15/2.0	M8	25	45	1500	100
0531 412 002			M8	30	50	1500	100
0531 412 003			M8	40	60	1500	100
0531 412 004			M8	50	70	1500	100
0531 412 005			M8	60	80	1500	100
0531 412 006			M8	80	100	1500	100
0531 412 007			M8	100	120	1500	50
0531 412 008			M8	120	140	1500	50
0531 412 009	Type B	38/40/2.0 40/60/3.0	M8	30	55	2500	100
0531 412 010			M8	40	65	2500	100
0531 412 011			M8	60	85	2500	100
0531 412 012			M8	80	105	2500	100
0531 412 013			M8	100	125	2500	100
0531 412 014			M10	40	67	2800	50
0531 412 015			M10	60	87	2800	50
0531 412 016			M10	80	107	2800	50
0531 412 017	M10	100	127	2800	50		
0531 422 001	Type C	EFIX-STRUT™ 41mm Series	M8	40	72	6000	50
0531 422 002			M8	60	92	6000	50
0531 422 003			M8	80	112	6000	50
0531 422 004			M8	100	132	6000	50
0531 422 005			M10	40	74	6000	50
0531 422 006			M10	60	94	6000	50
0531 422 007			M10	80	114	6000	50
0531 422 008			M10	100	134	6000	50