


Base Plate BP

The girder connection point can be welded by Beam Frame and Beam Connector, and can also be positioned as desired for special cases. It can cover all steel beam widths from 75-300mm by only 4 plates. High strength part designed for extra high application loads.

The Key Advantages

- Part of a modular system for supporting cable trays, pipes and miscellaneous secondary steel.
- Provides easy-to-install adjustable, flexible solutions for industrial and heavy commercial applications.
- Connection to steel using M16 threaded rods.
- Designed to provide extra-high load capacity.

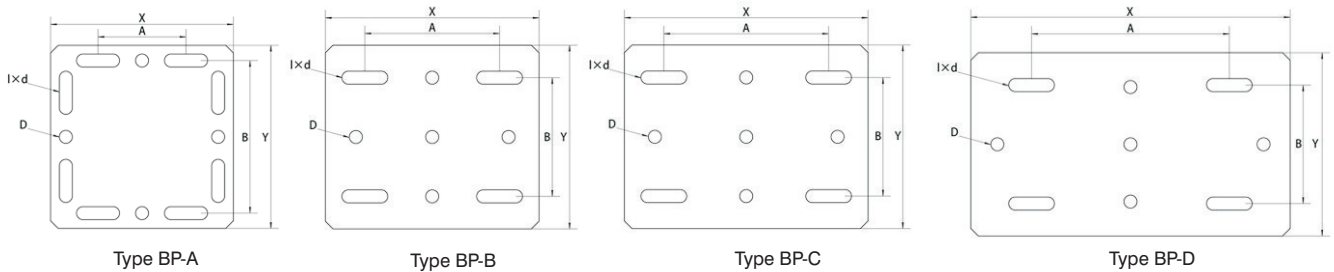

Type	Part-No.	For Flange Width [mm]	Plate X × Y [mm]	A [mm]	B [mm]	Thickness of Plate [mm]	Slots in Plate l × d [mm]	Hole in Plate D [mm]
BP-A	30812001	75-120	240 × 240	115.5	200	12	56.5 × 17	17
BP-B	30816002	121-160	280 × 240	176.5	155	12	60 × 17	17
BP-C	30823503	161-235	320 × 240	216.5	155	12	60 × 17	17
BP-D	30830004	235-300	420 × 240	260	155	12	60 × 17	17