

Art. 371







Hinged Pipe Clamp w/o Lining (E-Type)

Application/Advantages

- **Patented model.**
- For fixing of drinking and heating water pipe lines.
- **Snap-in closure with swiveling screw - simple and efficient.**
- Hinged pipe clamp allows for wide opening for easy pipe insertion.
- Secure stop points on top of the screw prevent the screw from falling down during the installation works.
- Labour cost saving during pipe insertion in overhead installations.

Technical Data

- **Material:** Steel 1.0332 acc. to DIN EN 10111
- **Zinc plating:** Electro zinc plated, 8–12 µm

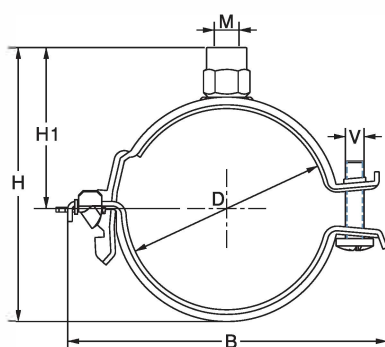

Article Number	Clamping Range		Connecting Thread	Dimensions [mm]						Pack Size [pcs]	Max. Rec. Load [N]
	D[mm]	[inch]		w x t	B	H	H1	SW	V		
1218 371 018	18-21	3/8	M8/M10	20x1.0	52	42	29	13	M6x25	150	800
1218 371 022	22-25	1/2	M8/M10	20x1.0	56	46	31	13	M6x25	150	800
1218 371 026	26-29	3/4	M8/M10	20x1.0	60	50	33	13	M6x25	100	800
1218 371 031	31-35	1	M8/M10	25x1.5	74	58	38	13	M6x25	100	1000
1218 371 036	36-40	–	M8/M10	25x1.5	79	64	41	13	M6x25	100	1000
1218 371 041	41-45	1-1/4	M8/M10	25x1.5	83	67	42	13	M6x30	50	1000
1218 371 046	46-52	1-1/2	M8/M10	25x1.5	90	74	46	13	M6x30	50	1000
1218 371 053	53-59	–	M8/M10	25x1.5	97	81	49	13	M6x30	50	1000
1218 371 060	60-66	2	M8/M10	25x1.5	104	88	53	13	M6x30	50	1000
1218 371 067	67-72	–	M8/M10	25x1.5	110	94	56	13	M6x30	50	1000
1218 371 073	73-77	2-1/2	M8/M10	25x1.5	115	100	59	13	M6x30	50	1000
1218 371 078	78-83	–	M8/M10	25x1.5	122	106	62	13	M6x30	50	1000
1218 371 084	84-90	3	M8/M10	25x1.5	129	113	65	13	M6x30	50	1000
1218 371 092	92-98	–	M8/M10	25x1.5	136	121	69	13	M6x30	50	1000
1218 371 099	99-104	–	M8/M10	25x1.5	141	128	72	13	M6x35	50	1000
1218 371 106	106-111	–	M8/M10	25x2.0	161	135	76	13	M8x35	25	1400
1218 371 115	115-119	4	M8/M10	25x2.0	168	143	80	13	M8x35	25	1400
1218 371 121	121-125	–	M8/M10	25x2.0	174	149	83	13	M8x35	25	1400
1218 371 126	126-130	–	M8/M10	25x2.0	179	154	85	13	M8x35	25	1400
1218 371 130	130-135	–	M8/M10	25x2.0	184	159	88	13	M8x35	25	1400
1218 371 138	138-144	5	M8/M10	25x2.0	193	168	92	13	M8x35	25	1400
1218 371 145	145-151	–	M8/M10	25x2.0	200	175	96	13	M8x35	25	1400
1218 371 152	152-156	–	M8/M10	25x2.0	205	180	98	13	M8x35	25	1400
1218 371 157	157-163	–	M8/M10	25x2.0	212	187	102	13	M8x35	20	1400
1218 371 164	164-170	6	M8/M10	25x2.0	219	194	105	13	M8x35	20	1400
1218 371 171	171-177	–	M8/M10	25x2.0	227	201	109	13	M8x35	20	1400