

Art. 910
EFIX Sliding Saddle (Electro-Galvanised)
Application/Advantages



- Designed for the suspension of pipe lines that vary in length due to temperature fluctuations.
- Sliding element with a maximum sliding distance of 55mm (and/or 60mm) for absorbing axial length changes of pipe lines.
- Very low overall height enables use even in restricted spaces.
- No possibility of sliding out.

Technical Data

- **Material:**
Steel 1.0332 acc. to DIN EN 10111
- **Zinc plating:**
Electro zinc plated, 8-12 μm
- **Temperature range:**
-40°C to +100°C

Installation

- Install sliding element according to the expected length expansion, so that sliding distance is not lost and sliding is not impeded.

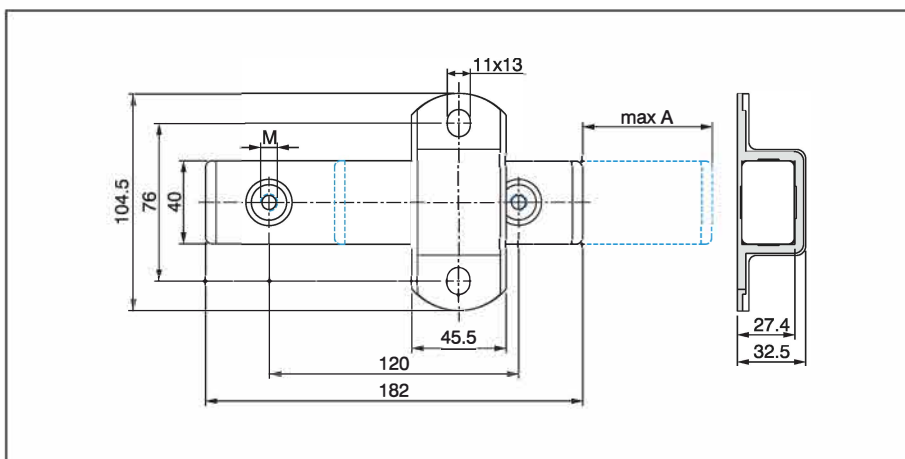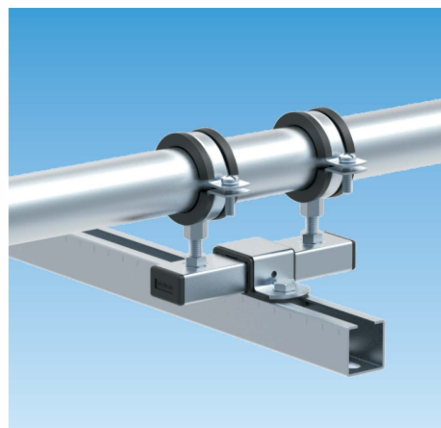

Article Number	Type	Thread M [mm]	Max. sliding distance [mm]	Pack Size [pcs]	Max. Rec. Load [N]
1014 910 001	For M8	M8	60	25	1500
1014 910 002	For M10	M10	55	25	1500
1014 910 003	For M12	M12	53	25	1500