

Art. 340

Sprinkler Band Hanger (Pre-Galvanised)

Application/Advantages


- For the attachment of sprinkler pipe lines.
- VdS and FM approval for the fixing of sprinkler systems.
- **Designed for suspending insulated pipe (with shield) or non-insulated pipe allowing for vertical adjustment.**
- One-piece design allows efficient installation of sprinkler pipes.
- Ideal for suspension using threaded pins and threaded rods.
- Easy height adjustment on the threaded rod.

Technical Data

- Material: Steel 1.0332 acc. to DIN EN 10111
- Zinc plating: Pre-galvanised acc. to DIN EN 10327

Note

* VdS approval certifications can be processed subject to request.

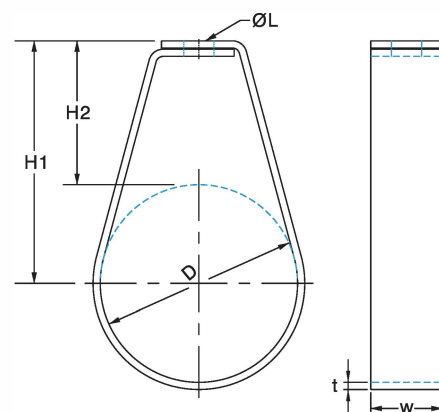

Loading Data

Size	Max. Recommended Load [N]
1/2"-2"	2,000
2-1/2"-4"	3,500
6"	5,000
8"	8,500

Article Number	Clamping Range			Dimensions [mm]				VdS* Approved	FM Approved	Pack Size [pcs]
	DN	D[mm]	[inch]	w x t	ØL	H1	H2			
0906 340 001	15	21.3	1/2	22x1.2	8.5	35	20	●	—	50
0906 340 002	20	26.9	3/4	22x1.2	8.5	35	20	●	—	50
0906 340 003	25	33.7	1	22x1.2	8.5	43	26	●	—	50
0906 340 004	32	42.4	1-1/4	22x1.2	8.5	50	30	●	—	50
0906 340 005	40	48.3	1-1/2	22x1.2	8.5	60	35	●	—	50
0906 340 006	50	60.3	2	22x1.2	8.5	60	30	●	—	50
0906 340 007	15	21.3	1/2	22x1.2	10.5	35	20	●	—	50
0906 340 008	20	26.9	3/4	22x1.2	10.5	35	20	●	●	50
0906 340 009	25	33.7	1	22x1.2	10.5	43	26	●	●	50
0906 340 010	32	42.4	1-1/4	22x1.2	10.5	50	30	●	●	50
0906 340 011	40	48.3	1-1/2	22x1.2	10.5	60	35	●	●	50
0906 340 012	50	60.3	2	22x1.2	10.5	60	30	●	●	50
0906 340 013	65	76.1	2-1/2	25x1.5	10.5	60	33	●	●	25
0906 340 014	80	88.9	3	25x1.5	10.5	81	40	●	●	25
0906 340 015	100	114.3	4	32x1.5	10.5	85	56	●	●	25
0906 340 016	150	168.3	6	32x2.0	12.5	113	60	●	●	25
0906 340 017	200	219.1	8	40x3.0	17.0	145	90	●	●	10